

MERC-1100/1300W-P

## Smart Module Controller



**Higher Yields**  
Module-level Optimization  
Increase System Energy  
Yield by 5% to 30%



**Flexible Design**  
Long String Design  
to Reduce Bps



**Active Safety**  
Safe Voltage Shutdown  
Ensure Firefighting and  
Maintenance Safety




**Smart O&M**  
Pinpointing Open-  
Circuit Fault for Quick  
Troubleshooting

# MERC-1100/1300W-P

## Smart Module Controller

Technical Specification	MERC-1100W-P	MERC-1300W-P		
<b>Input</b>				
Rated Input DC Power <sup>1</sup>	1100 W			1300 W
Max. input voltage		125 V		
MPPT operating voltage range		12.5 – 105 V		
Max. short-circuit current (Isc)		20 A		
Max. efficiency		99.5 %		
Weighted efficiency		99.0 %		
Overvoltage category		II		
<b>Output</b>				
Max. output voltage		80 V		
Max. output current		22 A		
Output bypass <sup>2</sup>		Yes		
Shutdown output voltage per optimizer <sup>3</sup>		1 V		
<b>Standards Compliance</b>				
Safety		IEC62109-1 (class II safety)		
RoHS		Yes		
<b>General Data</b>				
Dimension (W x H x D)	149 mm x 104 mm x 49 mm (5.9 in. x 4.1 in. x 1.9 in.)			
Weight (including cables)	1.0 kg (2.2 lb.)			
Installation part (optional)	PV Module Frame Plate/T-shaped Bolt <sup>4</sup>			
Input connector	Staubli MC4			
Input wire length	0.1 m (short input cable version) <sup>5</sup>			
Output connector	Staubli MC4			
Output wire length	0.1 m (+), 5.1 m (-) (short input cable version) <sup>5</sup>			
Operating temperature/humidity range	-40°C to +85°C <sup>6</sup> / 0%-100% RH			
Degree of protection	IP68			
Compatible Inverter	SUN2000-8/10/12/15/17/20KTL-M2 SUN2000-30/36/40KTL-M3 SUN2000-12/15/17/20/23/25KTL-M5 SUN2000-50KTL-M3			
String Configuration (Full Optimizer Configuration) <sup>7/8/9</sup> * MERC-1100/1300W-P support full optimizer configuration only	SUN2000-8~20KTL-M2	SUN2000-12~25KTL-M5	SUN2000-30~40KTL-M3	SUN2000-50KTL-M3
Minimum optimizers per string	8	8	8	8
Maximum optimizers per string	25	25	25	20
Maximum DC power per string	20,000 W	20,000 W	20,000 W	20,000 W

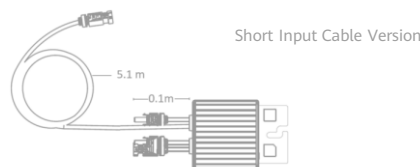

<sup>1</sup> The maximum power of PV module at STC shall NOT exceed the "Rated input DC power" of MERC -1100/1300W-P. PV Modules with up to +5% power tolerance are allowed.

<sup>2</sup> Any power optimizer, which is connected to an operating inverter in a PV string, will be bypassed when it fails.

<sup>3</sup> When the MERC -1100/1300W-P is disconnected from inverter or when the inverter is off, its output voltage will be 1 V.

<sup>4</sup> It is for PV module frame/extruded aluminum profile racking system installation.

<sup>5</sup> Pay attention to PV module wire length. To match PV modules with a split junction box and short output wire, the long-input-cable version (input wire: 1.3 m(+/-); output wire 0.1m(+)/2.9m (-)) of MERC -1100/1300W-P is available upon request.

<sup>6</sup> When the operating temperature of the MERC -1100/1300W-P reaches 70 °C to 85 °C, it may shut down due to over-temperature protection and report an over-temperature alarm. After the temperature decreases, it can automatically resume working without any damage.

<sup>7</sup> Each PV module under the same inverter must be equipped with a MERC -1100/1300W-P.

<sup>8</sup> SUN2000-450W-P2/600W-P and MERC -1100/1300W-P can NOT be used in mixture under the same Smart Energy/PV controller.

<sup>9</sup> It is recommended that strings under the same inverter have an equal capacity. If it is not feasible, the capacity difference between strings under the same inverter must not exceed 2 kW. Otherwise, the energy yield will be reduced.