

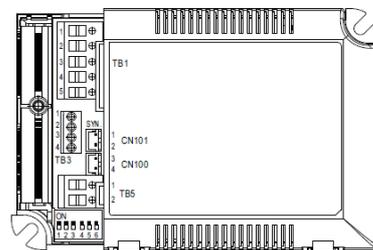


EL-40 Uni 350-1050 dim Dali

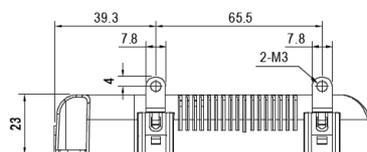

Type	EL-40 Uni 350-1050 dim Dali						
Part no.	980420350						
Output	Voltage	2-100V	2-80V	2-67V	2-57V	2-45V	2-40V
	Current	350mA	500mA	600mA	700mA	900mA	1050mA
	Power	42W					
Input	Rated voltage	180-295V AC 254-417V DC					
	Frequency	47-63 Hz					
	Rated current	0.23A/230V 0.2A/277V					
	Inrush current typ.	cold start 20A/230V AC, twidth = 260 µs measured at 50% Ipeak					
	Leakage current	<0.5mA/240V AC					
Material	synthetic material						
Colour	blue/white						
Power factor	>0.975/230V AC >0.96/277V AC						
Standby-power	<1.2W						
Efficiency typ.	91%						
Measuring point T _c	max. +90°C						
Ambient temperature T _a	-30°C ~ +60°C						
Dimensions (LxWxH)	123.5x81.5x23 mm						
Weight	240 g						
Connection primary	covered screw terminal						
Connection secondary	covered screw terminal and rapid connection system with release button						
Dimmable	DALI-interface and push dimming function						
Built-in active PFC function	yes						
Safety functions	shut-off at short-circuit and overheating						
Safety standards	UL 8750, EN 61347-1, EN 61347-2-13, EN 62384 independent approved						
DALI standards	IEC 62386-101, IEC 62386-102, IEC 62386-207						
EMI	EN 55015, EN 61000-3-2 Class C (≥40% load), EN 61000-3-3, EN 61000-4-2,3,4,5,6,8,11, EN 55024, EN 61547 Criteria A						

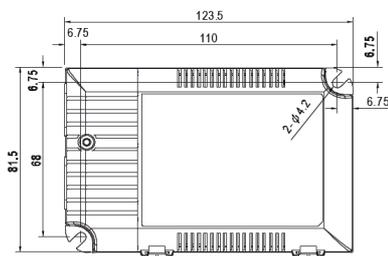

Eine Haftung für die von uns gelieferte Ware ist jedoch bei Vorliegen von natürlicher Abnutzung, Verschleiß sowie Verbrauch, insbesondere bei Betriebsmitteln LEDs etc. grundsätzlich ausgeschlossen und zwar auch dann, wenn diese bei Lieferung bereits mit der Ware verbunden sind. Angaben zur durchschnittlichen Lebensdauer und Lichtfarben dienen nur der Orientierung, sind unverbindlich und stellen keine Beschaffenheitsvereinbarung dar.

Technische und gestalterische Änderungen im Zuge stetiger Produktentwicklungen vorbehalten.
 Technical and design changes due to product developments are subject to change without prior notice.
 nobilé AG – Wächtersbacher Str. 78 - 60386 Frankfurt/M. Germany - www.nobile.de



rev. 0.0
 12.09.2018